

NEW BEDFORD


PUB. RD. DIV. NO.	STATE	FED. AID PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
1	MASS.		19	22	28

GENERAL AND TRAFFIC
LOCATION 10

SIGNAL PHASING, SEQUENCE &

TIMING FOR SEMI-ACTUATED

TRAFFIC SIGNAL CONTROL

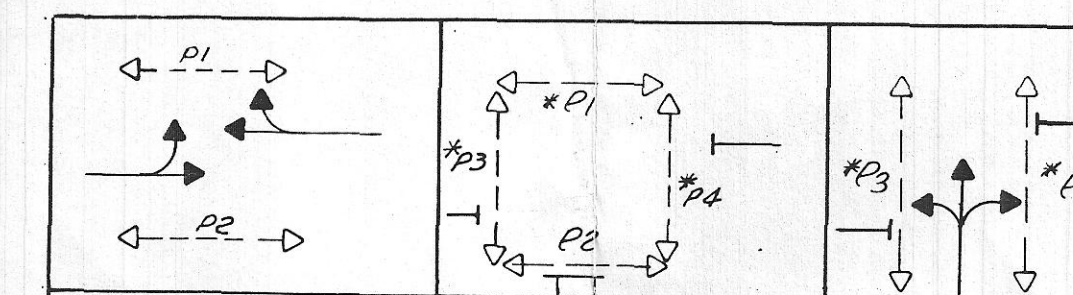

STREETS	DIRECTION	FACES	VEH. ROW	PED. CLR.	CLR. 1	CLR. 2	PED. ROW	PED. CLR.	CLR. 1	CLR. 2	VEH. ROW	PED. CLR.	CLR. 1	CLR. 2	FLASH
County Street	NB	AB	G	G	Y	R	R	R	R	R	R	R	R	R	Y
County Street	SB	CD	G	G	Y	R	R	R	R	R	R	R	R	R	Y
Elm Street	WB	E, F	R	R	R	R	R	R	R	R	G	G	Y	R	R
Pedestrian P1			FW	FDW	DW	DW	Wk	FDW	DW	DW	DW	DW	DW	DW	OUT
Pedestrian P2			Wk	FDW	DW	DW	Wk	FDW	DW	DW	DW	DW	DW	DW	OUT
Pedestrian P3			DW	DW	DW	DW	Wk	FDW	DW	DW	FW	FDW	DW	DW	OUT
Pedestrian P4			DW	DW	DW	DW	Wk	FDW	DW	DW	FW	FDW	DW	DW	OUT


* Actuated Pedestrian Walk

① Future Use (Actuated Exclusive Pedestrian Phase)

② Becomes DW If Phase B Is In Use

TIMING IN SECONDS

INITIAL INTERVAL	15	Min	6
VEHICLE INTERVAL	15	Min	4
MAXIMUM GREEN	40	25	30
YELLOW CLEAR		3	
ALL RED CLEAR		1	0
WALK INTERVAL	Var-able	7	7
PEDESTRIAN CLEAR		9	9
DETECTOR		LOCK	LOCK
RECALL	ON	OFF	OFF

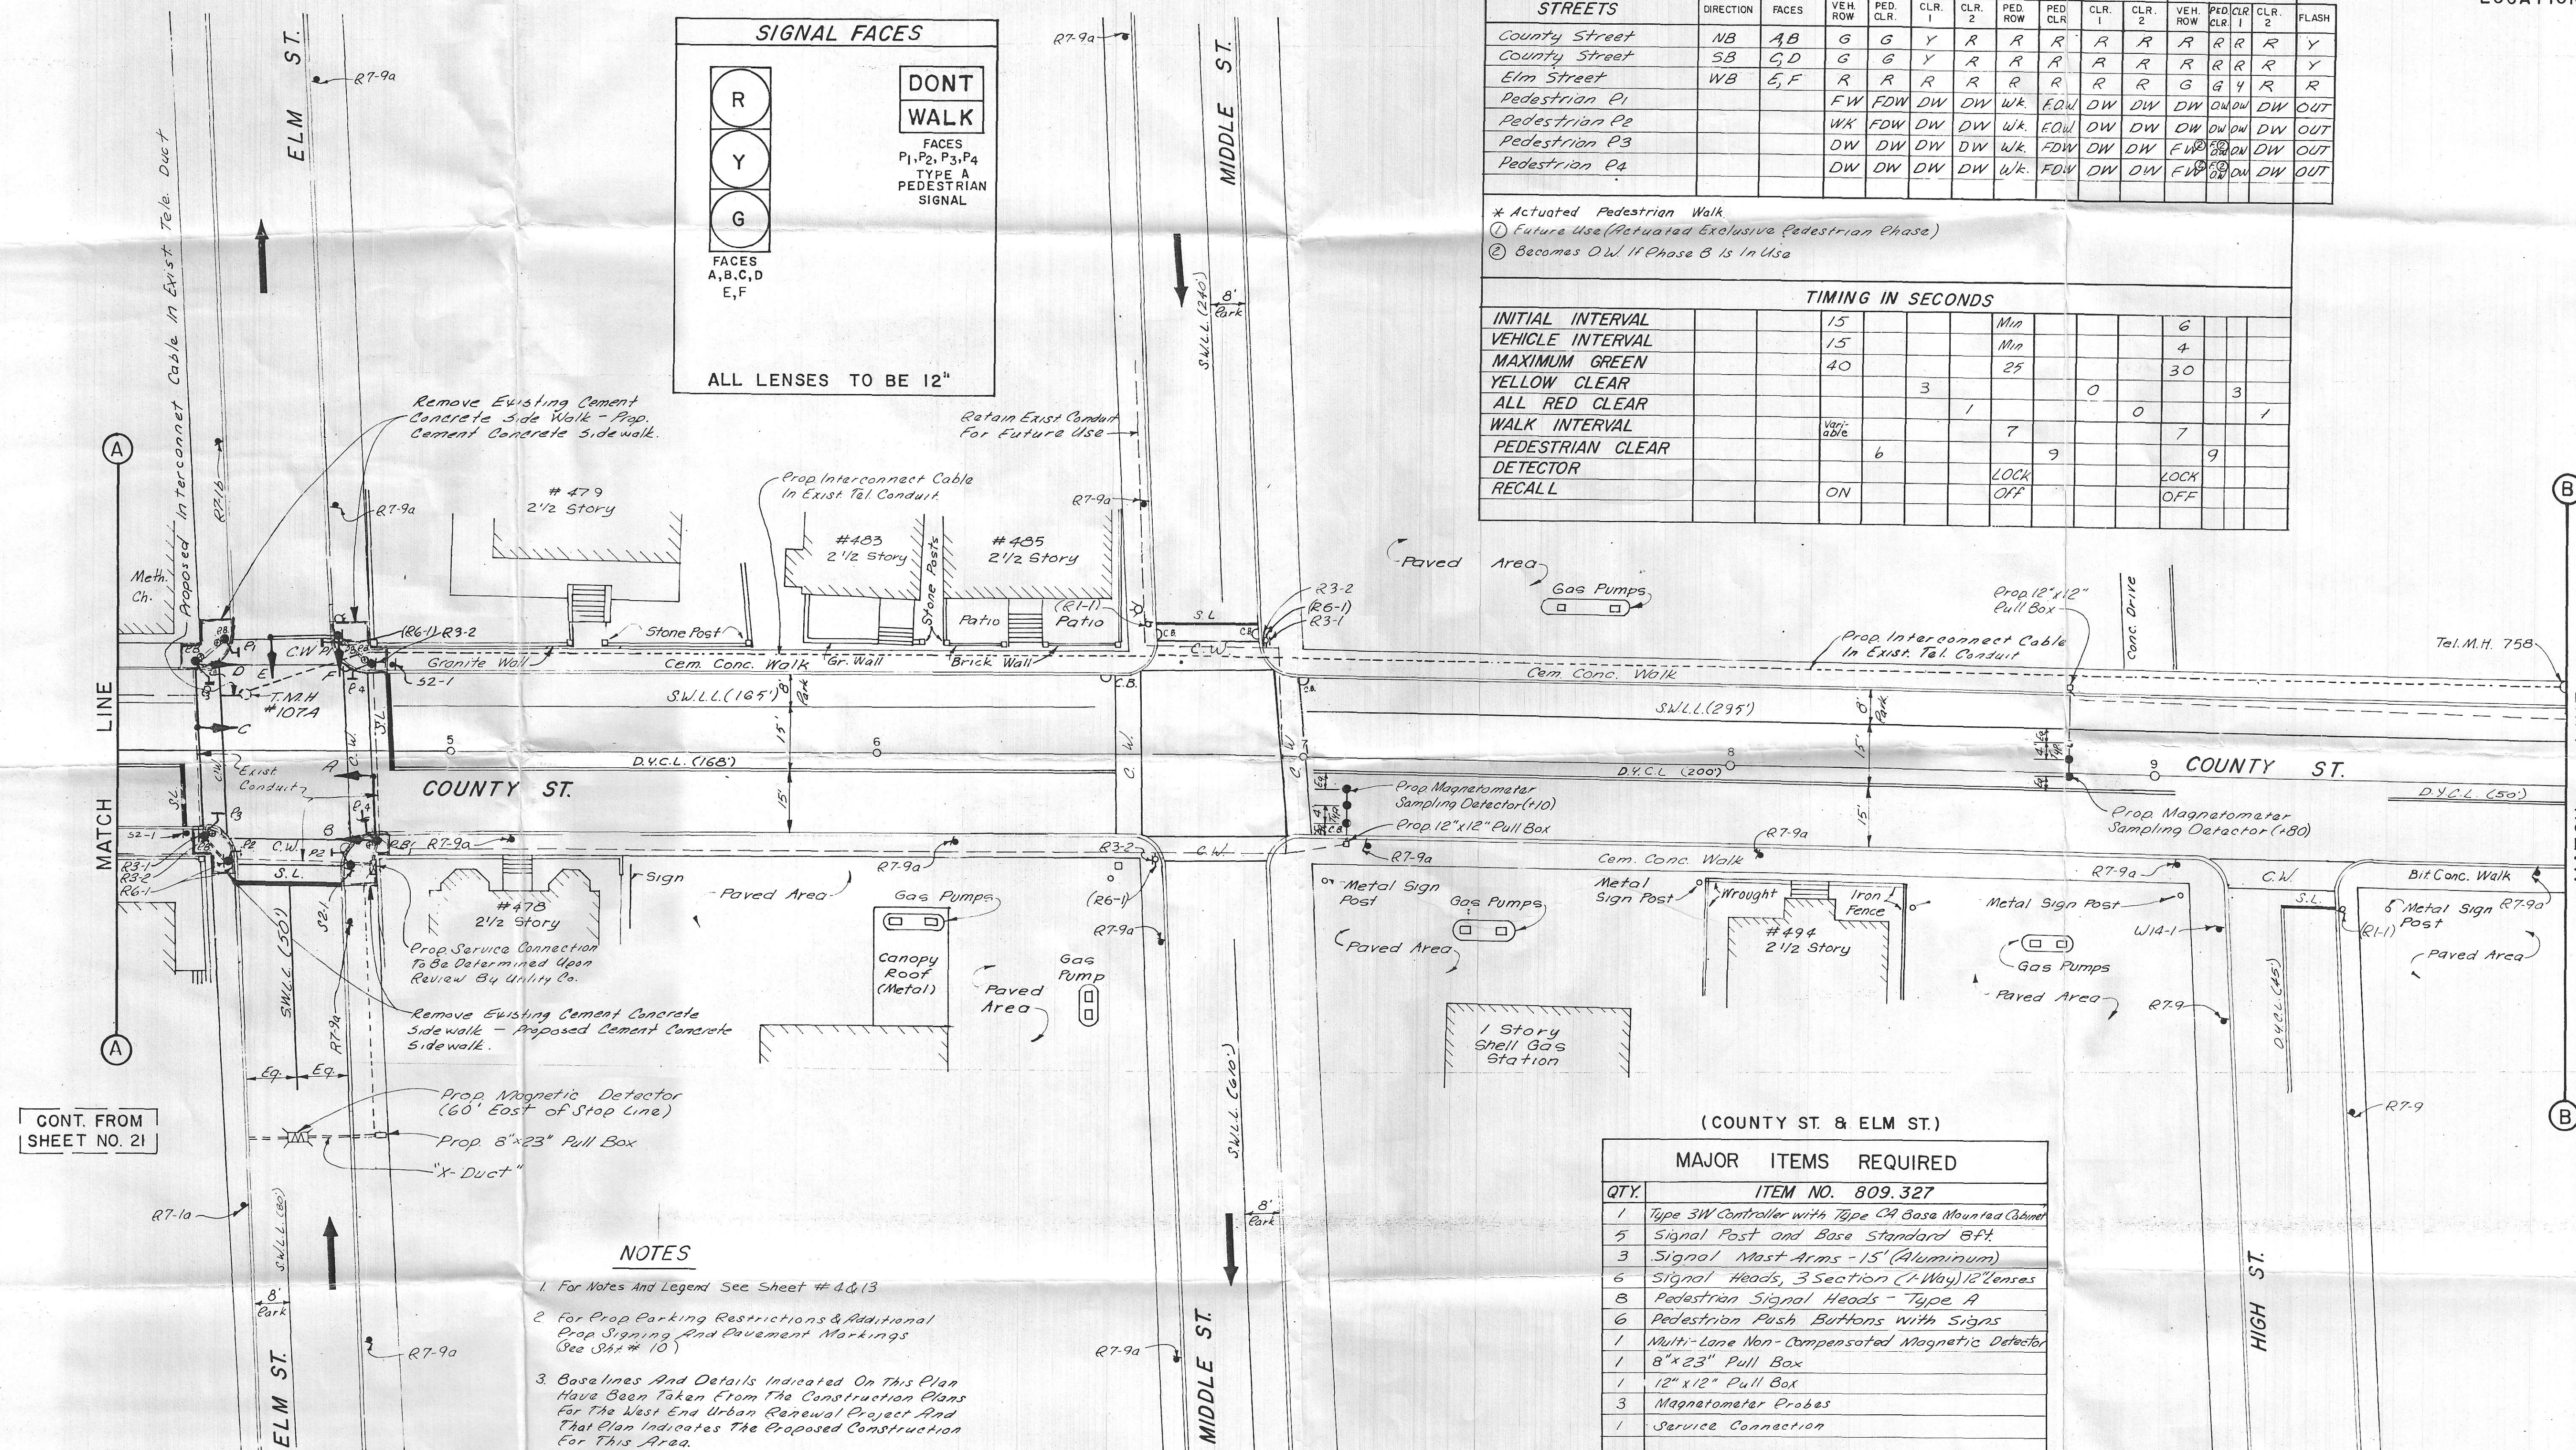

NOTES

- For Notes And Legend See Sheet # 4 & 13
- For Prop. Parking Restrictions & Additional Prop. Signing And Pavement Markings (See Plan # 10)
- Base Lines And Details Indicated On This Plan Have Been Taken From The Construction Plans For The West End Urban Renewal Project And That Plan Indicates The Proposed Construction For This Area.
- See Construction Plans For The West End Urban Renewal Project For Location Of Existing And Proposed Utilities.

(COUNTY ST. & ELM ST.)

MAJOR ITEMS REQUIRED

QTY.	ITEM NO. 809.327
1	Type 3W Controller with Type CM Base Mounted Cabinet
5	Signal Post and Base Standard BPT
3	Signal Mast Arms - 15' (Aluminum)
6	Signal Heads, 3 Section (1-Way) 12" Lenses
8	Pedestrian Signal Heads - Type A
6	Pedestrian Push Buttons with Signs
1	Multi-Lane Non-Compensated Magnetic Detector
1	8"x23" Pull Box
1	12"x12" Pull Box
3	Magnetometer Probes
1	Service Connection
	Necessary Duct, Cable, Labor, Miscellaneous Material and Equipment to Complete the Installation

HOR. SCALE IN FEET



IN CHARGE OF P.B.L.
DESIGNED BY T.L.
CHECKED BY R.B.R.
DRAWN BY U.D.C.
CHECKED BY U.F.L.