




Model SM336 Series 33.6K Dialup Modem

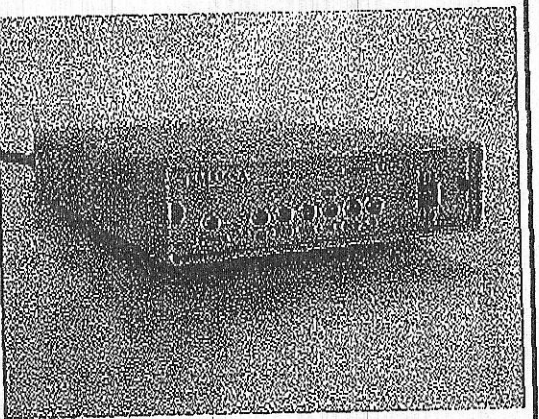


Features

- * Standard "AT" Command Set
- * Dual RS232/RS485 Interface
- * Call Monitor Speaker
- * Error Correction / Data Compression
- * Integral Power Supply
- * Rugged Metal Enclosure
- * Wide Operating Temperature Range -37 to +74°C
- * Standalone or 170 Plug-In Card

Description

The GDI Smart Modem SM336 is an AT command set compatible dial-up modem. This modem has been designed specifically for the demands of the traffic industry. The GDI Smart Modem SM336 can be used to communicate with traffic controllers, variable message signs, dial-up to the web or most any other dial-up application that requires communications over the public switched network. The GDI Smart Modem SM336 offers 26 data rates from 300 to 33,600 bps. The GDI Smart Modem SM336 is "AT" command set compatible with auto-dial, auto-answer, and auto-speed detect. The GDI Smart Modem is compatible with the GDI Smart Modem SM336 dial-up modem. The internal fused power supply eliminates the common "brick" external power supply. The unit is also available in a 170 Plug-in form factor.

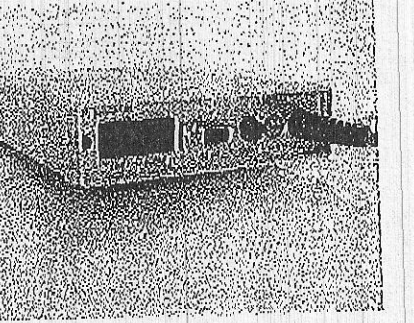

GDI Communications LLC
PO Box 1330, Verdi, NV 89439
Ph: 775-345-8000 Fax: 775-345-8010 E-mail: sales@sgdi.net