

| NEW BEDFORD |       |                    |             |           |              |
|-------------|-------|--------------------|-------------|-----------|--------------|
| PUB. NO.    | STATE | FED. AID PROJ. NO. | FISCAL YEAR | SHEET NO. | TOTAL SHEETS |
| 1           | MASS. |                    | 19          | 23        | 28           |

GENERAL AND TRAFFIC LOCATIONS 11, 12 & 13

(COUNTY STREET AND NORTH STREET)

MAJOR ITEMS REQUIRED

| QTY. | ITEM NO. 809.423                                                                                 |
|------|--------------------------------------------------------------------------------------------------|
| 1    | Type 4W Controller With Type CA Base Mounted Cabinet                                             |
| 5    | Signal Post and Base Standard 8 FT.                                                              |
| 1    | Signal Mast Arm - 12 FT. (Aluminum)                                                              |
| 1    | Signal Mast Arm - 20 FT. (Aluminum)                                                              |
| 5    | Signal Heads - 3 Section (1-Way) 12" Lenses                                                      |
| 1    | Signal Heads - 5 Section (1-Way) 12" Lenses                                                      |
| 8    | Pedestrian Signal Heads - Type A                                                                 |
| 6    | Pedestrian Push Buttons With Signs                                                               |
| 1    | Multi-Lane Non-Compensated Magnetic Detector                                                     |
| 1    | 8"x23" Pull Box                                                                                  |
| 4    | 12"x12" Pull Boxes                                                                               |
| 9    | Magnetometer Probes                                                                              |
| 1    | Signal Mast Arm - 15 FT. (Aluminum)                                                              |
| 1    | Service Connection                                                                               |
|      | Necessary Duct, Cable, Labor, Miscellaneous Material and Equipment to Complete the Installation. |

(COUNTY STREET AND MILL STREET)

MAJOR ITEMS REQUIRED

| QTY. | ITEM NO. 809.422                                                                                 |
|------|--------------------------------------------------------------------------------------------------|
| 1    | Type 4W Controller With Type CA Base Mounted Cabinet                                             |
| 4    | Signal Post and Base Standard 8 FT.                                                              |
| 1    | Signal Mast Arm - 12 FT. (Aluminum)                                                              |
| 1    | Signal Mast Arm - 20 FT. (Aluminum)                                                              |
| 5    | Signal Heads - 3 Section (1-Way) 12" Lenses                                                      |
| 1    | Signal Heads - 5 Section (1-Way) 12" Lenses                                                      |
| 8    | Pedestrian Signal Heads - Type A                                                                 |
| 6    | Pedestrian Push Buttons With Signs                                                               |
| 1    | Multi-Lane Non-Compensated Magnetic Detector                                                     |
| 1    | 8"x23" Pull Box                                                                                  |
| 1    | 12"x12" Pull Boxes                                                                               |
| 6    | Magnetometer Probes                                                                              |
| 1    | Fire Pre-emption Unit                                                                            |
| 1    | Service Connection                                                                               |
|      | Necessary Duct, Cable, Labor, Miscellaneous Material and Equipment to Complete the Installation. |


(COUNTY STREET AND KEMPTON STREET)

MAJOR ITEMS REQUIRED

| QTY. | ITEM NO. 809.328                                                                                 |
|------|--------------------------------------------------------------------------------------------------|
| 1    | Type 3W Controller With Type CA Base Mounted Cabinet                                             |
| 5    | Signal Post and Base Standard 8 FT.                                                              |
| 2    | Signal Mast Arms - 15 FT. (Aluminum)                                                             |
| 1    | Signal Mast Arm - 25 FT. (Aluminum)                                                              |
| 6    | Signal Heads - 3 Section (1-Way) 12" Lenses                                                      |
| 8    | Pedestrian Signal Heads - Type A                                                                 |
| 6    | Pedestrian Push Buttons With Signs                                                               |
| 2    | Multi-Lane Non-Compensated Magnetic Detector                                                     |
| 1    | 8"x23" Pull Box                                                                                  |
| 1    | 12"x12" Pull Box                                                                                 |
| 3    | Magnetometer Probes                                                                              |
| 1    | Service Connection                                                                               |
|      | Necessary Duct, Cable, Labor, Miscellaneous Material and Equipment to Complete the Installation. |

NOTES

- For Notes And Legend See Sheet No. 4 & 12.
- For Traffic Signal Phasing, Sequence & Timing See Sheet No. 24.
- For Prop. Parking Restrictions & Additional Prop. Signage And Pavement Markings (See Sht. # 9).
- Baselines And Details Indicated On This Plan Have Been Taken From The Construction Plans For The West End Urban Renewal Project And That Plan Indicates The Prop. Construction For This Area.
- Service Connection To All 3 Controllers Shown On This Sheet Shall Be Determined Upon Review By Utility Co.
- See Construction Plans For The West End Urban Renewal Project For Location Of Existing & Proposed Utilities.

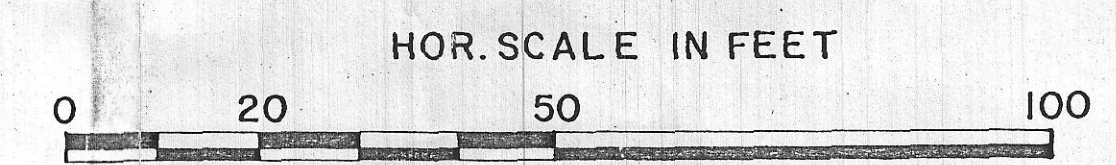

IN CHARGE OF  
DESIGNED BY  
CHECKED BY  
DRAWN BY  
CHECKED BY

DAL  
TL  
AGR  
PG  
JFL

CONT. FROM SHEET NO. 22