

SIEMENS**EAGLE Aluminum Signal
SIG Pedestrian*
Bulletin 1180****Features**

Meets or exceeds ITE specifications.
Design provides minimum weight but maximum rigidity and strength.

HOUSING -- One piece die-cast unit with serrations in 5° increments at each end. Each housing has provisions for mounting two terminal blocks. Housings may be fastened together to make multi-section signals.

DOOR -- One piece die-cast aluminum unit equipped with stainless steel hinge pins. Two stainless steel captive eye-bolts and wing nuts permit easy access to the inside of the housing.

VISOR -- One piece formed aluminum visor is secured with stainless steel hardware. Cutaway and tunnel visors are available.

REFLECTOR -- Aluminum reflector treated with specular ALZAK® finish.

LENS -- Polycarbonate lens with completely opaque background. Glass lenses are also available.


GASKETS -- Weathertight quality of the unit is assured by separate lens and door gaskets.

LAMP SOCKET -- Gasketed, prefocused, and may be rotated for positioning the lamp filament without using tools.

POSITIVE POSITIONING -- Positive positioning and locking is achieved through the use of serrated brackets.

MOUNTING -- Completely compatible with all standard signal hardware.

**Available in 12" (300mm) only.*

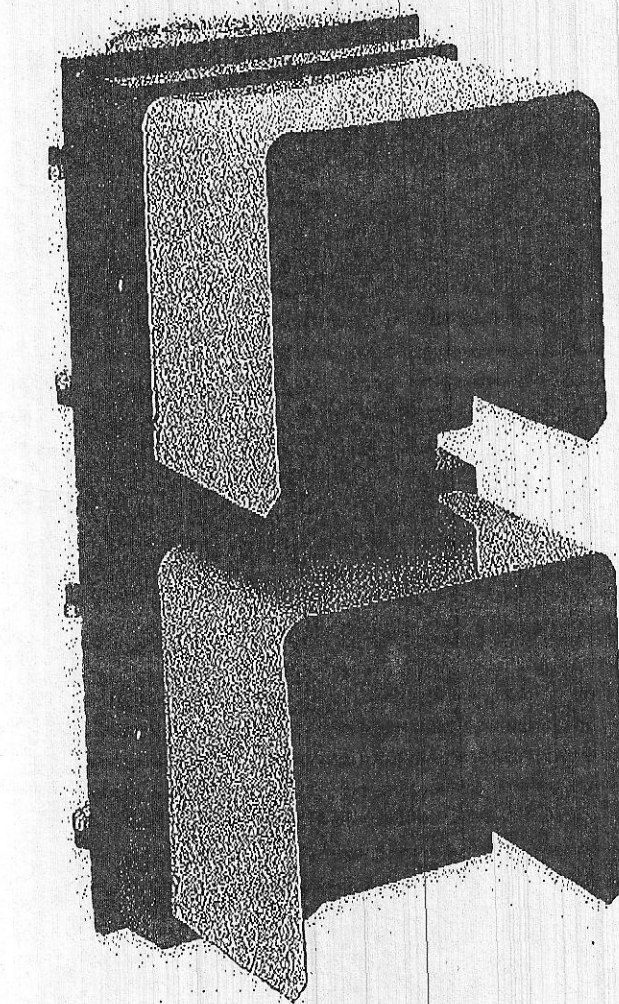

Siemens ITS
Siemens Energy & Automation, Inc.
Business Unit Intelligent Transportation Systems

6004 Cameron Road • Austin, TX 78754
Ph: (512) 837-8310 • Fax: (512) 837-0195
<http://www.its.siemens.com>