




W/RED SIGNAL HEAD
W/PED PUSH BUTTON
W/R10-3f & SIGN SADDLE
W/D3-1
STA 62+23.6, 27.0' RT

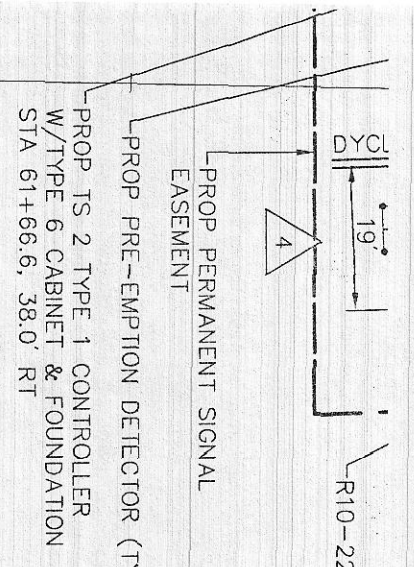

ITEM 1042.902
RECONSTRUCTION OF TRAFFIC CONTROL SIGNAL
PURCHASE STREET AT DEANE STREET
LIST OF MAJOR ITEMS REQUIRED

QUANTITY	DESCRIPTION
1	80 TS 2 TYPE 1 CONTROLLER IN A TYPE 6 BASE MOUNTED CABINET INCL. FOUNDATION
1	TS POST, 8' STANDARD INCL. FOUNDATION
1	TS 20' MAST ARM TYPE 2, STEEL, INCL. FOUNDATION
3	TS 25' MAST ARM TYPE 2, STEEL, INCL. FOUNDATION
10	SIGNAL HEAD, 3-SECTION, 12" LENSES
8	PEDESTRIAN SIGNAL HEAD
4	PEDESTRIAN PUSHBUTTON W/R10-3f AND SIGN SADDLE
4	PULL BOXES-12"x12"
4	TYPE C, 2-CHANNEL CARD RACK LOOP DETECTOR AMPLIFIER
9	WIRE LOOP DETECTOR
4	EMERGENCY PRE-EMPTION OPTICAL DETECTORS & DETECTOR CABLE
1	EMERGENCY PRE-EMPTION 4 CHANNEL PHASE SELECTOR
1	EMERGENCY PRE-EMPTION SYSTEM CHASSIS
1	EMERGENCY PRE-EMPTION STROBE (WHITE LENS)
1	SERVICE CONNECTION (OVERHEAD)
1300 ±	3" PVC CONDUIT, TYPE NM PLASTIC (UL) SCHEDULE 80

PLUS NECESSARY DUCT, CABLE, LABOR, MISCELLANEOUS MATERIAL AND EQUIPMENT TO COMPLETE THE INSTALLATION AND PROVIDE AN OPERATING TRAFFIC CONTROL SIGNAL.

ENCE
808