

TRANSMITTED  
BY

ION  
ALL HOLD  
ASE  
PTION  
PHASE  
IENCE

RECEIVED  
IS BEING  
S PRESENT.  
D  
OR


S

ENCY

DETECTOR DATA						
DETECTOR NO.	NO. SECTION / SIZE	NO. OF TURNS	OPERATIONS	DELAY /EXT	CALL PHASE	LOOP CONNECTION
1	1-6'X25' 1-6'X20' QUADRUPOLE	2-4-2	PRESENCE	0	ø2	SERIES
2	1-6'X25' 1-6'X20' QUADRUPOLE	2-4-2	PRESENCE	0	ø6	SERIES
3	2-6'X20' QUADRUPOLE	2-4-2	PRESENCE	0	ø4	SERIES
4	1-6'X25' 1-6'X20' QUADRUPOLE	2-4-2	PRESENCE	0	ø8	SERIES

NOTE: DELAY AND EXTENSION TIMINGS SHALL BE PROGRAMMED IN THE CONTROLLER

770'± | 3" PVC CONDUIT, TY  
PLUS NECESSARY DL  
EQUIPMENT TO COMP  
TRAFFIC CONTROL SI

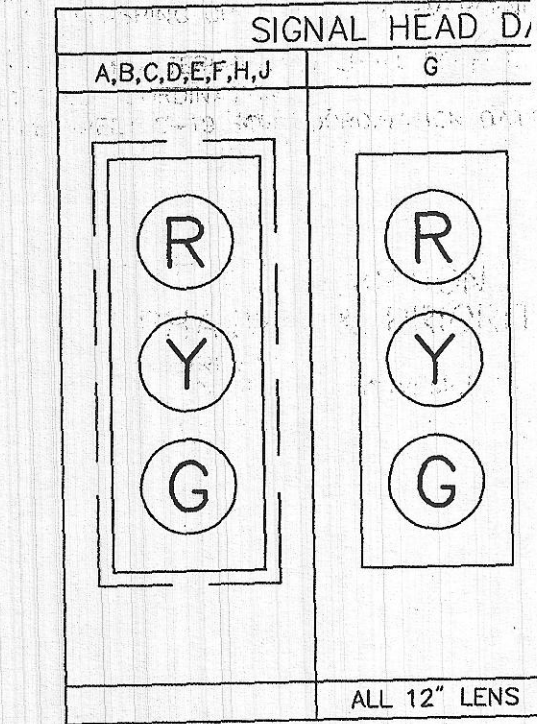

- NOTES: 1. ALL SIGNAL HEADS SHALL BE F  
2. ALL SIGNAL HEADS, EXCEPT SIX  
SHALL BE EQUIPPED WITH 5" ±  
3. ALL SIGNAL DISPLAYS SHALL B  
W/L.E.D. MODULES AND TUNNEL